

# ROSave.Z\* Depth Cartridge Filters

## For Reverse Osmosis Pretreatment Using Z.Plex\* Technology

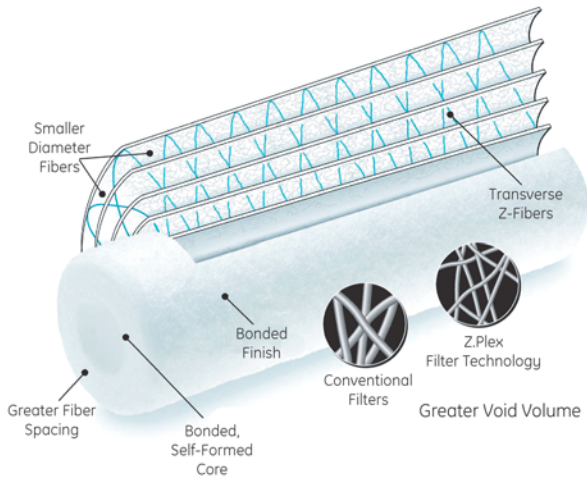


Figure 1: Z.Plex Filter Technology

### Description and Use

ROSave.Z is manufactured using patent pending Z.Plex filter technology (Figure 1) and is engineered for reverse osmosis pretreatment and other pure water applications. ROSave.Zs' proprietary filter matrix provides unmatched performance in these applications.

- Up to twice the life of conventional depth filters
- Up to 50% lower pressure drop
- Up to 100% greater dirt holding capacity
- Superior SDI reduction
- Melt-bonded exterior ensures no media migration
- Provides lower total cost of filtration operations
- NSF 42 certified, FDA compliant

### Typical Applications

Reverse osmosis pretreatment in industries including:

- Bottled water
- Beverage
- Electronics

### General Properties


#### Materials of Construction

ROSave.Z filters are made of polypropylene construction. Tables 1 and 2 provide information on dimensions and flow performance.

Table 1: Dimensions

Nominal Outside Diameter	Nominal Inside Diameter
2.75" (6.4 cm)	1" (2.5 cm)

Table 2: ROSave.Z 1 and 5 micron vs. Conventional 5 micron Flow Performance in Clean Water<sup>1</sup>

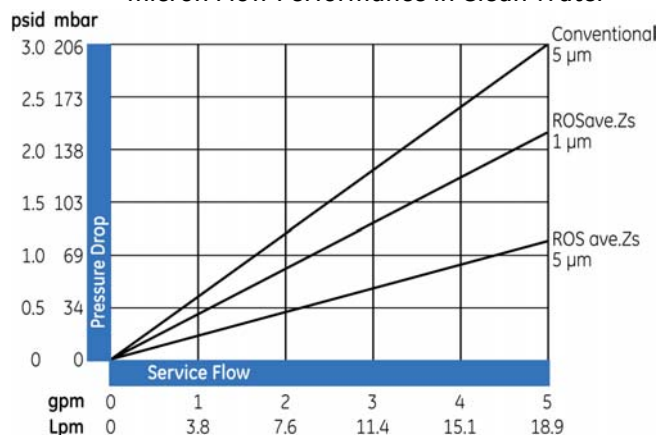

<sup>1</sup> Data based on 10" length filter



Find a contact near you by visiting [www.ge.com/water](http://www.ge.com/water) and clicking on "Contact Us".

\* Trademark of General Electric Company; may be registered in one or more countries.

©2010, General Electric Company. All rights reserved.

## Micron Ratings, Lengths and End Adapters

- Micron ratings: 1 and 5 micron nominal
- Standard lengths fit most housings - custom lengths are also available
- Wide range of end adapters including self-sealing spring, 222 and 226 O-rings, and extended cores.

## Additional Information

ROSave.Z cartridge filters are made from thermally-bonded fibers of polypropylene. GE certifies that it uses no resin binders, lubricants, antistatic or release agents or other additives in the manufacture of these cartridges, and that the resin used for manufacturing the filter media meets the food contact requirements of U.S. FDA 21CFR regulations. When required, specify only FDA compliant sealing materials and end-adapters.

GE filter cartridges are designed and manufactured for resistance to a wide range of chemical solutions. Conditions will vary with each application and users should carefully verify chemical compatibility. Please contact your GE representative for more information.

The ROSave.Z element is tested and certified by NSF International against NSF/ANSI Standard 61 for material requirements only.

If you are ordering ROSave.Z filters with standard ends (with no adapter on either end), select one designation from each of the first three columns. Your Product Order Number will look like this: RO.Zs 05-40. If you are ordering ROSave.Zs with end adapters, select designations from all applicable columns. Your Product Order Number will look like this: RO.Zs 05-40 XK.

**Table 4: Ordering Information**

Type	Micron Rating, mm	Cartridge Length, Inches (cm)	End #1 Adapter	End #2 Adapter	Material
RO.Zs	01 = 1	9 ¾ (24.8)	L = Extended Core	K = Self seal spring	O-Rings
	05 = 5	9 7/8 (25.4)	E = 222 O-Ring	H = Fin	S = Silicone
I.D. - 1.0		10 (25.4)	F = 226 O-Ring	S = Solid End	E = EPDM
O.D. - 2.5		19 ½ (49.5)	X = Standard ROSave.Zs plain end (non gasket)	X = Standard ROSave.Zs (no gasket) Y = Flat Gasket	V = Viton2
		20 (50.8)			B = Buna
		29 ¼ (74.3)			P = Santoprene (flat gasket only)
		30 (76.2)			
		40 (101.6)			

