

WORLD CLASS CLEAN AIR TECHNOLOGY


PURE 5 & PURE 10 TANK MOUNTED DRYING SYSTEMS

Whether supplying air to your entire operating or isolating a specific tool or application, Tsunami's "Pure" series regenerative dryers provide the same world class level of air cleanliness at an affordable **price**.

Pure dryers are designed as complete packages and include inline pre-filtration to remove bulk liquids and fine particulates. Tank-mounted systems allow your compressed air system to increase capacity by storing pre-treated, ready-to-use air.

PURE-5 & PURE-10 BENEFITS

- Tsunami pre-filtration
- Compact, wall-mountable design reduces footprint
- Dew points down to -80°F
- Relative Humidity down to .01% RH

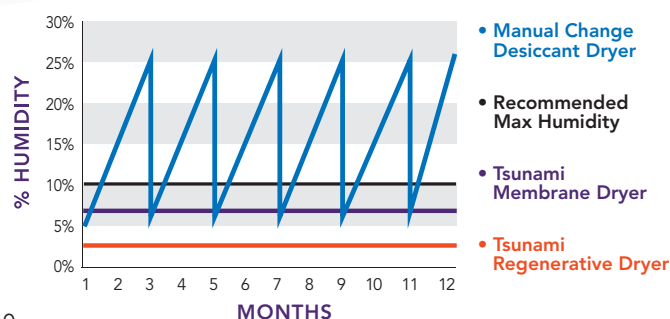

• Manual Change Desiccant Dryer

• Recommended Max Humidity

• Tsunami Membrane Dryer

• Tsunami Regenerative Dryer



21999-1010



21999-1105



NEW!



FOR MORE INFORMATION ON TSUNAMI

Contact Your Parts Supplier or Call 1.800.782.5752

10531 Dalton Ave NE | Monticello, MN 55362 | TSUNAMI.US.COM

PURE 5 & PURE 10 DRYING SYSTEMS

Tsunami Compressed Air Solutions™ offers premium air filtration and drying equipment designed to assist customers in obtaining clean, dry air for their specific application needs.

- 1

Regenerative Air Dryer
- 2

Hard Coat Anodized Housing
- 3

Air Control Valve
- 4

Pre-Filtration
 - 1st Stage Water Separator
 - 2nd Stage Oil Coalescing Filter
 - Optional Moisture Minder Drains
- 5

60 Gallon Reciever Tank (Tank Models)
- 6

High Flow Piston Outlet Regulator (Tank Models)



SIZING & ORDERING INFORMATION

MAX CFM	ITEM #	PORT SIZE (NPT)	POWER	DRAIN	MAX PSI	MAX °F	DIMENSIONS (IN)
17	21999-1105	¼ INLET / ½ OUTLET	120V	Float	175	150	25 X 17 X 12
40	21999-1010	½ INLET / 1 OUTLET	110V	Float	175	150	27 X 21 X 12
40	21999-1010-MM	½ INLET / 1 OUTLET	120V	Pneumatic	175	150	30 X 21 X 12
40	21999-0955	½ INLET / ½ OUTLET	110V	Float	175	150	69 X 51 X 27



FOR MORE INFORMATION
Call **1.800.782.5752** or Visit **TSUNAMI.US.COM**

